

B8195


Low emissivity (Silver Low E)

B8196

Low wick

B8288

Block out

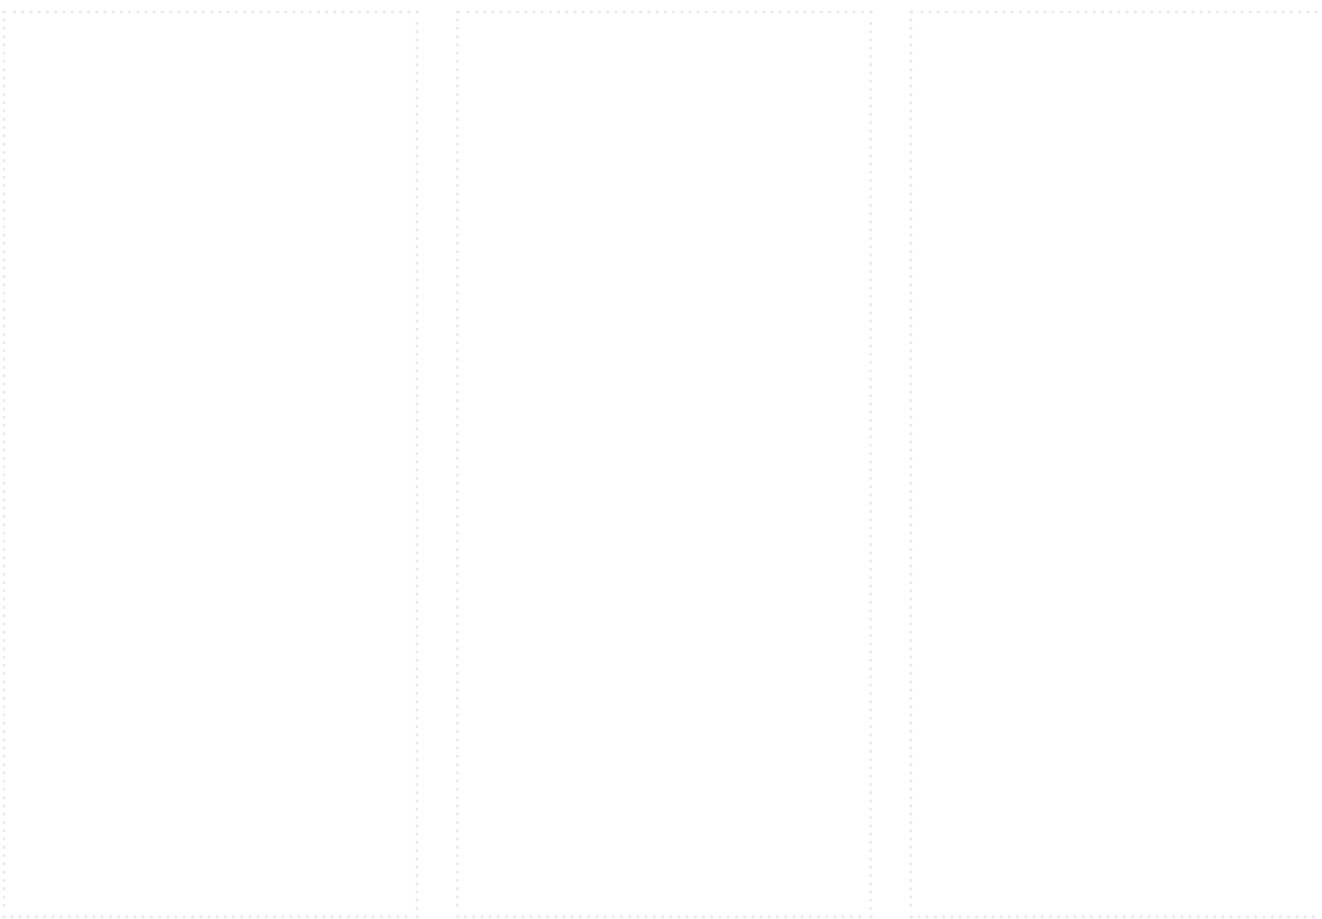**On request**Auf Anfrage - Sur demande -
bajo pedido - Op verzoek**9909**

250 cm

9909

250 cm, 300 cm

Other colours on request - Andere Farben auf Anfrage - Autres coloris sur demande -
Otros colores bajo pedido - Andere kleuren op aanvraag.**Technical specifications**

Technische Daten - Données techniques - Datos técnicos - Technische specificaties

	B8103	B8120 Stripes	B8195 Low emissivity	B8196 Low wick	B8288 Block out
Total Weight - DIN ISO 2286/2:1998 Gesamtgewicht - Poids total - Peso total - Totaal gewicht	650 g/m ²	670 g/m ²	610 g/m ²	650 g/m ²	800 g/m ²
Composition Zusammensetzung - Composition - Composición - Samenstelling	PES + PVC	PES + PVC	PES + PVC	PES + PVC	PES + PVC
Fabric (Warp / Weft) - DIN ISO 2060:1994 Gewebe - Tissu - Tejido - Weefsel	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex
Lacquering Lackierung - Laquage - Tipo lacado - Lacquering	Top: glossy Bottom: glossy	Top: glossy Bottom: glossy	Top: dull Bottom: Low-E	Top: glossy Bottom: glossy	Top: glossy Bottom: glossy
Breaking Strength (Warp / Weft) - EN ISO 1421/1:1998 Höchstzugkraft - Résistance rupture - Resistencia urdimbre - Treksterkte	2500 N/5cm 2500 N/5cm	2500 N/5cm 2500 N/5cm	2500 N/5cm 2300 N/5cm	2500 N/5cm 2300 N/5cm	2500 N/5cm 2500 N/5cm
Tear Strength (Warp / Weft) - DIN 53363:2003 Weiterreißkraft - Résistance à la déchirure - Resistencia urdimbre - Scheurweerstand	270 N 270 N	270 N 270 N	270 N 270 N	270 N 270 N	270 N 270 N
Adhesion - EN ISO 2411:2000 Haftung - Adhérence - Adhesión - Hechting	100 N/5cm	100 N/5cm	90 N/5cm	100 N/5cm	100 N/5cm
Emissivity Emissionsgrad - Émissivité - Emisividad - Emisiviteit	-	-	back side 0,34 max	-	-
Temperature Resistance - EN 1876/1:1998 Temperatuursbeständigkeit - Tenue à la température - Resistencia térmica - Temperatuursbestendigheid	-40/+70 °C	-40/+70 °C	-40/+70 °C	-40/+70 °C	-40/+70 °C
Light Fastness - ISO 105 B02:2014 Lichtechtheid - Tenue à la lumière - Solidez color - Lichtechtheit	7-8	7-8	7-8	7-8	7-8
Fire Behaviour Brennverhalten - Reaction au feu - Resistencia al fuego - Brandgedrag	M2 (NF P 92 507 2004) B1 (DIN 4102 1998)	M2 (NF P 92 507 2004) B1 (DIN 4102 1998)	M2 (NF P 92 507 2004) B1 (DIN 4102 1998) ADR Cl. II (UNI 8456 - 9174)	M2 (NF P 92 507 2004) B1 (DIN 4102 1998)	M2 (NF P 92 507 2004) B1 (DIN 4102 1998)
Reaction to Fire - EN 13501-1 +A1:2009 Reaktion auf Feuer - Réaction au feu - Reacción al fuego - Reactie op vuur	B-s2,d0	B-s2,d0	B-s2,d0	B-s2,d0	B-s1,d0

Produced in Belgium & France in ISO 9001:2015 certified plants

All our technical characteristics are indicative. Please note that all information given in this document is intended to be useful and informative and is correct to the best of our knowledge at time of print. No liability can be accepted for inaccuracies or omissions. Certain colours may contain substances (lead pigments) which fall under the Annex XIV of the Reach Regulation 1907/2006/CE. In order to know which colours fall under this annex, please contact Sioen. Upon request those substances can be eliminated from the product. Other colours are available on demand.



CAT02001EN001


SIOEN**TENTS****B8103 - B8120 - B8288 - B8196 - B8195****New large colour range**










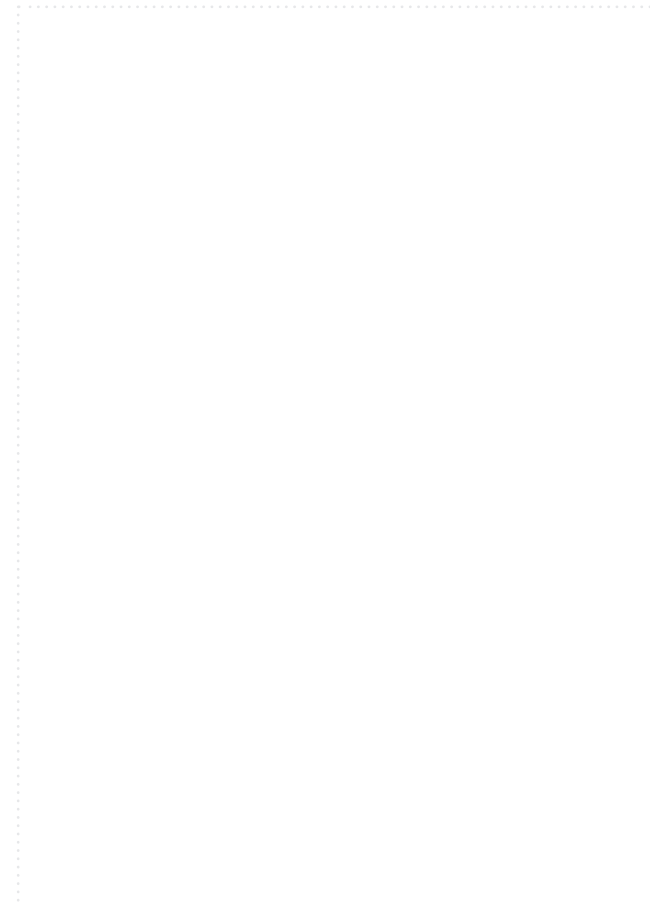

- Stripe options
- High UV resistant
- Flame retardant
- Low wick option available

SIOEN

SIOENTextile Solution Provider - Go to www.sioentechnicaltextiles.com for more information.
Fabriekstraat 23 - 8850 Ardooie - Belgium - +32 (0) 51 740 900 - info@sioen.com - www.sioen.com

B8103



 1021 - RAL 1021 ↔ 250 cm	 NEW - 1731 ↔ 250 cm	 1932 ↔ 250 cm
 NEW - 1927 ↔ 250 cm	 3016 ↔ 250 cm	 5007 ↔ 250 cm
 5029 ↔ 250 cm	 6001 ↔ 250 cm	 7001 ↔ 250 cm
 7244 - RAL 7043 ↔ 250 cm	 NEW - 7249 ↔ 250 cm	 NEW - 7330 ↔ 250 cm

Other colours on request - Andere Farben auf Anfrage - Autres coloris sur demande - Otros colores bajo pedido - Andere kleuren op aanvraag.

 7500 - RAL 9006 ↔ 250 cm	 NEW - 7931 - RAL 7006 ↔ 250 cm	 7999 ↔ 250 cm	 9909 ↔ 218 cm, 250 cm, 300 cm, 320 cm
---	---	--	--



B8120

Stripes



Other colours on request - Andere Farben auf Anfrage - Autres coloris sur demande - Otros colores bajo pedido - Andere kleuren op aanvraag.



3986 ↔ 218 cm	5981 ↔ 218 cm	6982 ↔ 218 cm	7991 ↔ 218 cm
-------------------------	-------------------------	-------------------------	-------------------------